



Sonic – freestanding screens technical specification



Sonic - freestanding screens

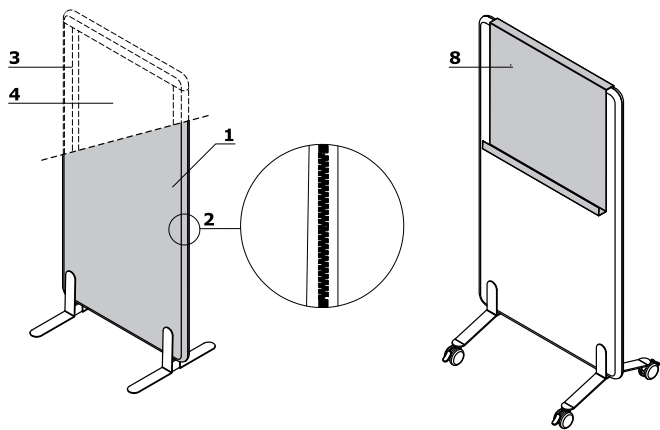


1. **Screen** - upholstered, accoustic class A, pinable
2. **Zipper** - decorative, colour: graphite - cannot be unzipped
3. **Frame** - glued solid wood structure
4. **Filling** - acoustic nonwoven with high sound absorption and dispersion properties
5. **Freestanding feet** - powder coated metal
6. **Spacer** - powder coated metal; intended for use in screens situated between desks or other solid support from both sides
7. **Wheels with brake** - Ø65 mm
8. **Magnetic dry** - wipe whiteboard

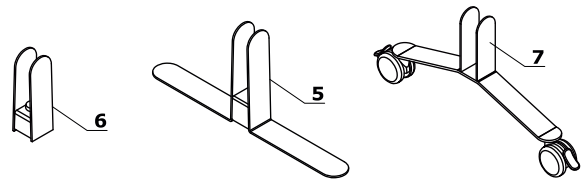


Sonic - connecting element for free standing screens


Connector - powder-coated steel




ZW5



ZW6





ZW7



ZW8

Dimensions (mm)

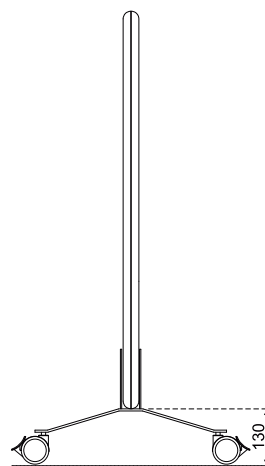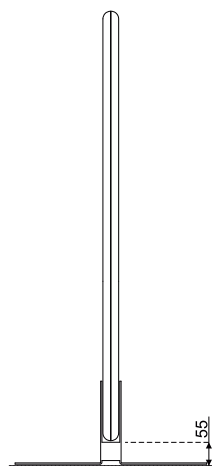

Sonic - freestanding screens *




ZW592
590 / 40 / 1250
8.3 kg




ZW594
590 / 40 / 1450
8.1 kg




ZW596
590 / 40 / 1650
9 kg




ZW598
590 / 40 / 1850
9.4 kg



ZW692
690 / 40 / 1250
7.5 kg




ZW694
690 / 40 / 1450
8.7 kg




ZW696
690 / 40 / 1650
9.7 kg




ZW698
690 / 40 / 1850
10.4 kg




ZW792
790 / 40 / 1250
8.5 kg




ZW794
790 / 40 / 1450
9.4 kg




ZW796
790 / 40 / 1650
11.3 kg




ZW798
790 / 40 / 1850
12 kg




ZW892
890 / 40 / 1250
9.2 kg



ZW894
890 / 40 / 1450
10.8 kg




ZW896
890 / 40 / 1650
11 kg




ZW898
890 / 40 / 1850
11.2 kg


Sonic - freestanding screens *




ZW992
990 / 40 / 1250
11.7 kg



ZW994
990 / 40 / 1450
12.5 kg



ZW996
990 / 40 / 1650
13.8 kg



ZW998
990 / 40 / 1850
15.8 kg

Sonic - connecting element for free standing screens *



ZW5
150 / 37 / 50
0.37 kg



ZW6
150 / 116 / 50
0.37 kg




ZW7
150 / 116 / 50
0.53 kg




ZW8
150 / 190 / 50
0.69 kg

Magnetic dry-wipe whiteboard *



TB01
700 / 92 / 635
4.5 kg

Fabric Nemo

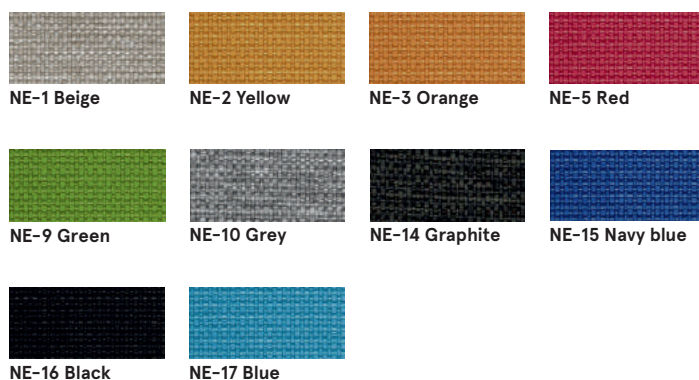

Technical data:

Material	polyester 100%
Fabric weight	366g/m2
Abrasion resistance rubs	PN-EN ISO 12947 - 2:2 100,000
Pilling resistance	scale 1-8, max. 8, PN-EN ISO 105 - B02 (3-4)
Colour fastness to light	scale 1-5, max. 5, PN-EN 1021 - 2,
Colour fastness to rubbing	PN-EN 1021 - 1
	skscale 1-5, max. 5, EN ISO 105x12 (wet/dry) 4-5

Fabric Runner - second price group



Technical data:

Material	80% polyester, 20% post-consumer recycled polyester
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2 70,000 Martindale cycles
Pilling resistance	scale 1-5, max 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max 5, EN ISO 105x12 (wet/dry) 4-5
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-2 Match, CA TB 117-2013, BS EN 1021-1 (cigarette) Class Uno UNI 9175 Class 2, EMME

Fabric Medley - second price group



Technical data:

Material	polyester 100%
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 75,000 cykli Martindale
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry (4-5/4-5)
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-1 (cigarette) BS 476 Part 7, Class 2 Class Uno UNI 9174 - UNI 8457 CA TB 117-2013 ASTM E 84 Class I

Fabric Atlantic * - second price group



Technical data:

Material	polyester 100%
Fabric weight	530 g/lm (17.09 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 110,000 Martindale cycles
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry)
Flammability	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette)

Fabric Vita - second price group



Technical data:

Material	Surface: 98,5% PVC, 1,5% PU Substrate: 50% polyester, 50% Cotton
Fabric weight	850g/m2 ± 10% (1190G/lin. m ± 10%)
Abrasion resistance rubs	BS EN ISO 5470-2, 100,000 Martindale cycles
Colour fastness to light	6 (ISO 105 - B02)
Colour fastness to rubbing	wet: 4, dry: 4 (ISO 105 - X12)
Flammability	BS EN 1021 - (cigarette) BS EN 1021 - 2 (match) BS 5852 - (Ignition Source 5) BS 7176 - (Medium Hazard)
Flexes	BS EN ISO 7854 - Method B, 400.000 Flexing cycles
Anti-microbial / Anti-fungal	AATCC 147





Fabric Mica - second price group



Technical data:

Material	post-consumer recycled polyester 97%, polyester 3%
Fabric weight	305 g/lm
Abrasion resistance rubs	60,000 rubs martindale (EN ISO 12947-2)
Pilling resistance	scale 1-5, max. 5 - EN ISO 12945-2, 4-5
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02, 5-8
Rubbing fastness	dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12
Flammability	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-1 Cigarette BS EN 1021-2 Match BS 476 Part 7 class I

Fabric Go Check - second price group

			
G-66136 Blue	G-66135 Light blue	G-60080 Dark grey	G-66138 Navy blue
			
G-60084 Dark graphite	G-68149 Dark green	G-68152 Green	G-60079 Grey
			
G-64183 Marsala	G-63079 Orange	G-64171 Red	G-64172 Burgundy
			
G-61144 Brown	G-61145 Dark brown		

Technical data:

Material	100% Trevira CS
Fabric weight	435g/lm
Abrasion resistance rubs	80,000 rubs martindale (EN ISO 12947-2)
Pilling resistance	scale 1-5, max. 5 - EN ISO 12945-2, 5
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02, 5-8
Rubbing fastness	dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12
Flammability	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette BS 5852 Crib 5 BS 7176 Medium hazard DIN 4102 - B1 NFP 92-503/504/505 M1 ÖNORM A3800-B1-B3825-Q1 UK Class Uno UNI 9175 Class 1 I EMME FAR/JAR 25.853 (a) (i) (ii) CA TB 117-2013 DIN EN 13501-1 B-s1,d0 AM 18 - NF D 60-013-(only for fabric)

Fabric Charles * - second price group

			
C-01 Black	C-05 Grey	C-06 Beige	C-14 Brown
			
C-18 Rusty	C-21 Red	C-30 Pink	C-31 Marsala
			
C-32 Dark blue	C-35 Blue	C-41 Yellow	C-44 Olive
			
C-45 Green			

Technical data:

Material	100% polyester
Fabric weight	433g/m2
Abrasion resistance rubs	90,000 Martindale cycles (EN ISO 12947-2)
Pilling resistance	EN ISO 12945-2, 5
Light fastness	EN ISO 105-B02, 5
Rubbing fastness	dry: 4-5, wet: 4-5, EN ISO 105x12
Flammability	EN 1021, 1

* There is a possibility of ordering the product in full colour spectrum of Charles range, as per Dekoma pattern book, within the standard delivery time.

Fabric Synergy – third price group



Technical data:

Composition	95% Virgin Wool, 5% Polyamide
Fabric weight	400g/m ² (560g/lm)
Abrasion resistance rubs	100.000 Martindale cycles
Colour fastness to light	ISO 105 – B02
Colour fastness to rubbing	EN ISO 105x12 (dry/wet)
Flammability	EN 1021 – 1&2 (cigarette & match) BS 7176 Low Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 (58 kg/m ³ CMHR Foam) UNI 9175 Classe 1 IM EN 13501-1 Adhered Class D, s1, d0 IMO FTP Code (Part 8) The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match) BS 5852 Ignition Source 5 when FR treated BS 7176 Medium Hazard when FR treated EN 13501-1 Adhered Class B, s1, d0 when FR treated EN 13501-1 Un-adhered Class D, s2, d0 when FR treated BS 5867-2: Type B Curtains & Drapes when FR treated

Fabric Silvertex – third price group

Technical data:

Material	Topcoat: 100% Vinyl Backing: 100% Polyester Hi-Loft™
Fabric weight	685 gr/m ²
Abrasion resistance	>300,000 cycles Martindale
UV-resistance	>= 7 (1000 hours, blue wool scale)
Cold Crack resistance	-23°C
Flame retardancy	NF P 92-503 / M2 EN 1021, Part 1&2 DIN 4102 B2 ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten ÖNORM A 3800, Teil I, Qualmbildungsklasse QI – schwachqualmend IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8 (MED) Marine Equipment Directive in its current valid version UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME) UNE 23.727-90 IR /M2 EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability ECE R 118 (replaces Directive 95/28/EC) FMVSS 302 FAR 25/853
Antimicrobial	Antifungal Protection, Antibacterial Protection, Antimycotic Protection

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling's pattern book, within 15 working days.

Fabric Tessa – third price group



T-08 Cream white



T-09 Beige



T-05 Grey



T-12 Dark brown




T-03 Dark grey


Technical data:

Material	95% polyester, 5% acrylic
Fabric weight	500g/m2
Abrasion resistance rubs	75,000 Martindale cycles (EN ISO 12497-2)
Pilling resistance	EN ISO 12945-2, 4-5
Light fastness	EN ISO 105-B02, 4
Rubbing fastness	dry: 4-5, wet: 4-5, EN ISO 105x12


Fabric Oceanic – third price group



O-16 Pink




O-05 Coral



O-12 Red




O-07 Yellow



O-04 Light green




O-15 Light blue



O-11 Blue



O-13 Light grey



O-08 Dark grey



O-01 Black

Technical data:

Material	100% post-consumer recycled polyester
Fabric weight	497g/m2
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-2)
Pilling resistance	EN ISO 12945-2, 5
Light fastness	EN ISO 105-B02, 5
Rubbing fastness	dry: 4, wet: 4, EN ISO 105x12
Flammability	EN 1021, - 1&2 (Cigarette and Match) BS 7176 Low Hazard BS 5852 Ignition Source BS 7176 Medium Hazard


Fabric Quest – third price group



Q-26 Pink



Q-25 Orange




Q-24 Red




Q-21 Pastel yellow



Q-19 Beige



Q-18 Olive



Q-13 Light green



Q-07 Light blue



Q-08 Navy blue



Q-04 Graphite

Technical data:

Material	100% post-consumer recycled polyester
Fabric weight	330g/m2
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-2)
Light fastness	EN ISO 105-B02, 4-6
Rubbing fastness	dry: 4, wet: 4, EN ISO 105x12
Flammability	EN 1021, - 1&2 (Cigarette and Match) BS 7176 Low Hazard UNI 9175 Classe 1 IM BS 476 Part 7 Class 1Y (Adhered) EN 13501-1 Adhered Class B, s1, d0 EN 13501-1 Un-adhered Class B, s1, d0 BS 5852 Ignition Source 5 with EnviroFlam5 BS 7176 Medium Hazard with EnviroFlam5 IMO FTP Code (Part 8) with EnviroFlam5

Fabric Grain – third price group



GR-64249 Pink



GR-62122 Yellow



GR-62016 Light orange



GR-63117 Orange



GR-68243 Olive




GR-66236 Sky-blue




GR-66232 Navy blue



GR-60301 Grey



GR-61252 Beige




GR-61250 White

Technical data:

Material	92% post-consumer recycled polyester 8% polyester
Fabric weight	615g/m2
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-2)
Pilling resistance	EN ISO 12945-2, 5
Light fastness	EN ISO 105-B02, 5-7
Rubbing fastness	dry: 4-5, wet: 4-5, EN ISO 105x12
Flammability	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette CA TB 117-2013

Fabric Atlas – fourth price group

			
AS-531 Orange	AS-501 Pink	AS-651 Red	AS-681 Burgundy
			
AS-391 Brown	AS-781 Navy blue	AS-161 Dark grey	AS-111 Light grey
			
AS-971 Light green	AS-981 Dark green		

Technical data:

Material	90% new wool, 10% nylon
Fabric weight	286g/m2, 400g/lm
Abrasion resistance rubs	100,000 cykli Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 6-7
Colour fastness to rubbing	ISO 105-X12:2001, (wet/dry) 4-5/4-5
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013

Foot, Connecting element

			
M009 Aluminum semi-matt RAL9006	M015 White semi-matt RAL9010	M154 Anthracite semi-matt RAL7043	M115 Black semi-matt RAL9005
